



Emissions of Local Heavy Fuel Oils

Ali A. Rabah, Mustafa Abusief Abbas

*Department of Chemical Engineering, Faculty of Engineering, University of Khartoum,
Khartoum, Sudan (E-mail: alirabah@yahoo.com)*

Abstract: This work aims to measure the emission level of local heavy fuel oils used in boilers and furnaces. Two types of fuel oil are commonly used in the Sudan. These are heavy fuel oil (HFO) produced in Elobied refinery and heavy coker gas oil (HCGO) of Khartoum refinery. The experimental combustion set up consists of a combustion chamber, a burner, a stack and a forced draught fan. Besides measurement of temperature and concentrations of flue gas emissions (CO_2 , H_2O , CO , SO_x , NO_x), combustion air and fuel flow rates were measured. A theoretical combustion model was developed to predict the combustion performance. The model employs material balance, energy balance and reaction kinetics. It was used to validate the experimental results. The elemental analysis of fuel oils revealed that they have low sulfur content. It was also found that HCGO has high concentrations of heavy metals (Fe, V, Ni, Ca, Zn). The rheological test revealed that HFO has a non-Newtonian behavior and high atomizing temperature. The combustion performance parameters of air fuel ratio, excess air, emissions were evaluated. The results revealed significant emissions of CO and NO_x in particular at low fuel air ratio ($\gamma < 1.1$). The lowest emission level is found to be at 15 to 20 % excess air.

Keywords: *Combustion, heavy coker gas oil, NO_x emission, CO emission*

1. INTRODUCTION

Two major categories of fuel oil burned in thermal power systems are distillate oils and residual oils. Distillate oils include kerosene and diesel fuels. They are more volatile and less viscous than residual oils. They have negligible nitrogen and ash contents and usually contain less than 0.3 percentage sulfur (by weight). Distillate oils are used mainly in domestic and small commercial applications. Residual oil is sometimes referred to as furnace or heavy fuel oil (HFO) or Bunker C or No. 6 fuel oil. Residual oil is more viscous and less volatile than distillate oil. Because residual oils are produced from the residue remaining after the lighter fractions have been removed from the crude oil, they contain significant quantities of ash, nitrogen, and sulfur. Residual oils are used in process steam and power production [1-3].

Pollutants or emissions of fuel oil include CO, NO, NO_2 , NO_x , SO_2 , SO_x and particulate matter (PM) such as soot [4-6]. The pollutants emit when the combustion is incomplete. Combustion is said complete if all carbon in the fuel burns to CO_2 , all hydrogen burns to H_2O and all sulfur (if any) burns to SO_2 . Conversely, combustion is incomplete if the combustion products contain any unburned fuel or components such as C, H_2 , CO, OH. Insufficient oxygen is considered as the main reason of incomplete combustion. Combustion of lighter

distillate oils results in significantly lower PM formation than does combustion of heavier residual oils. Other reasons include insufficient mixing and dissociation. The latter occurs at high temperatures. The magnitude of these emissions depends, in addition to incomplete combustion, on many factors such as (1) the grade and composition of the fuel (2) the type and size of the fire equipment (boiler) (3) the firing and loading practices used (4) equipment maintenance practice and management. With increasing environmental awareness and concern a number of controlling measures and technologies have been developed to minimize emissions from fuel oil. These equipment are called "add-on air pollution control" (APC) equipment [5].

The total thermal power generated in the Sudan is about 400 MW. There are mainly two brands of fuel oils used. These are heavy oils produced from local refineries (Elobied refinery and Khartoum refineries). HFO of Elobied is the residue of atmospheric distillation unit while HFO of Khartoum refinery is a product of coke; hereafter called heavy coker gas oil (HCGO). The crude for HFO is Nile blend while for HCGO is Fula blend, both are Sudanese oil brands.

The objective of this work is to determine the emission levels of HFO and HCGO.

2. MATERIALS AND METHODS

2.1 Experimental Setup

Figure 1 shows schematic representation of the experimental setup. Table 1 shows the key of items in Fig. 1. The experimental setup consists of a combustion chamber, a burner, a stack and a force draught fan and electric heater. The setup facilitates the measurements of temperature and concentration flue gas and flow rates and temperatures of air and fuel

2.2 Laboratory Analysis

Samples of HFO and HCGO were analyzed for physical, chemical and elemental properties. Element analysis is meant to analyze the main fuel elements (Carbon C, Hydrogen H₂, Sulfur S, Oxygen O₂, and Nitrogen N₂) and contaminants (Aluminum, Lead, Sodium, Barium, Manganese, Tin, Boron, Molybdenum, Titanium, Chromium, Nickel, Vanadium, Copper, Silicon, Iron, Silver and any other elements). Table 2 shows the analysed parameters and the standard test method used in the analysis. The samples were analyzed in a accredited laboratory. The flue gases concentration of CO₂,

CO, O₂, NO, NO₂, NO_x and SO₂ are measured using the flue gas analyzer Model Testo 340.

Table 1. Key for experimental setup

Item	Descriptions
1	Combustion Chamber (0.5 m diameter, 1.5 m height)
2	Firing Set (Burner tip, Draught Fan, Air Control valve)
3	Orifice meter
4	Flue gas sampler duct.
5	Flue gas control valve
6	Chamber drain valve
7	Flue gas duct
8	Electrical fuel oil heater (thermostat controller up to 140 °C)
9	Fuel storage tank
10	fuel recirculation line
11	Fuel pump (up to 20 bar)
12	Fuel pump section line

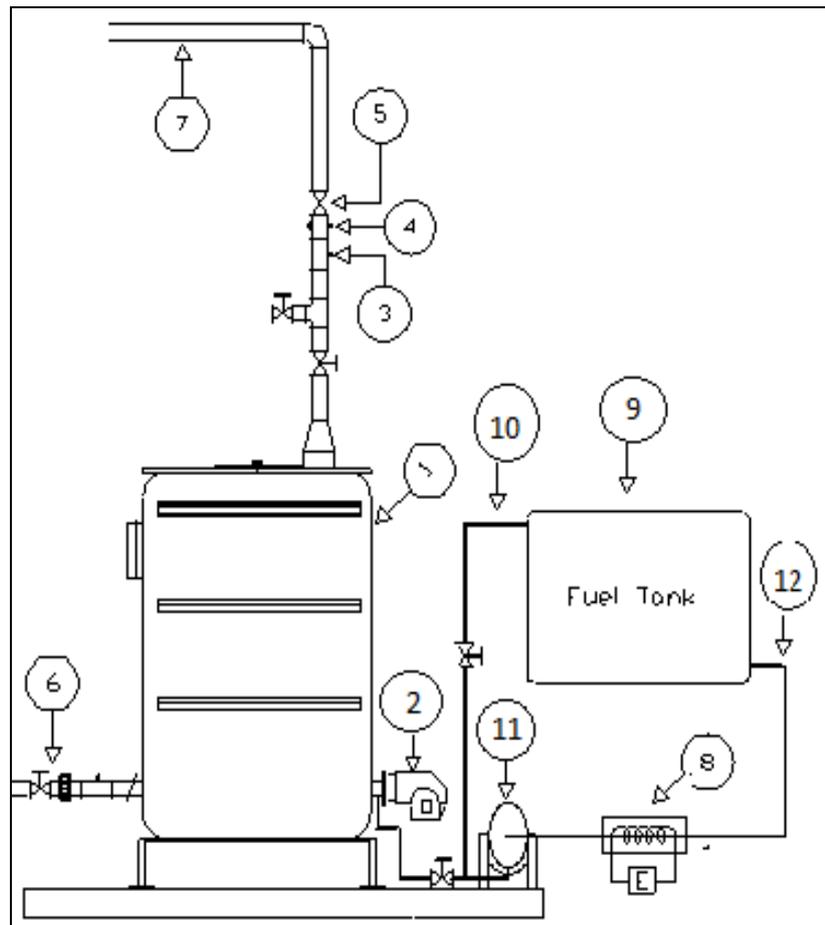


Fig. 1. Experimental setup


Table 2. Standard test methods

Test item	Unit	Method	
Flash point	°C	KS M2010:2004	
Kinematic viscosity at 50 C	m ² /s	KS M2014:2004	
Pour point	°C	KS M2010:2004	
Carbon residue	wt %	KS M ISO 1037:2006	
Water and sediment	wt %	KS M ISO 3734:2003	
Ash	wt %	KS M ISO 6245:2003	
Sulphur	wt %	KS M ISO 8754:2003	
Water	wt %	KS M ISO 9029:2003	
Density at 15 °C	g/cm ³	KS M 2002:2001	
Fuel Elemental analyser	C	wt %	ASTM 5291
	H	wt %	ASTM 5291
	N	wt %	ASTM 5782
Heat of Combustion	kJ/kg	KS M 2057:2006	
Net heat of combustion	kJ/kg	KS M 2057:2006	
Contaminants Elemental analyser	mg/kg	ASTM-D 4951 ICP	
Al, Pb, Na, Ba, Mg, Sn, B, Mo, Ti, Cr, Ni, V, Cu, Si, Fe, Ag	(ppm)		

3. COMBUSTION MODEL

Combustion is often studied as a complete combustion. For the sake of reminder the definition of complete combustion is repeated again in the following sentences. The combustion is said to be complete if all carbon in the fuel burns to CO₂, all hydrogen burns to H₂O and all sulfur (if any) burns to SO₂. Conversely, the combustion is incomplete if the combustion products contain any unburned fuel or components such as C, H₂, CO, OH. Insufficient oxygen is considered as the main reason of incomplete combustion. Other reasons include insufficient mixing and dissociation. The later occurs at high temperatures.

The minimum amount of air required for complete combustion also called stoichiometric or theoretical air is determined from the following combustion equation:

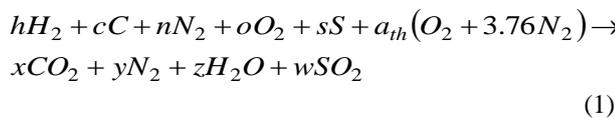

where, a_{th} is the stoichiometric coefficient for air. The values of the lower case letters h, c, o, s is obtained from elemental analysis directly. The flue gas (CO₂, H₂O and N₂, SO₂) coefficient x, y, z, w and a_{th} are obtained by balancing the coefficient of C, H₂, N₂, O₂ and S of Eq. (1). The fuel air ratio is determined by taking the ratio of the mass of air (m_{air}) to the mass of fuel (m_{fuel}) as:

$$AF = \frac{m_{air}}{m_{fuel}} \quad (2)$$

The ratio of actual mass of air (m_{air,actual}) to stoichiometric or theoretical mass of air (m_{air,theoretical}) is called the stoichiometric ratio (γ) as

$$\gamma = \frac{m_{air,actual}}{m_{air,theoretical}} \quad (3)$$

The excess air is defined as (γ-1).

4. RESULTS AND DISCUSSION

4.1 Fuel properties

Table 3 shows the analysis of HFO and HCGO fuels. Fuel elemental analysis shows no significant difference between HFO and HCGO. Density and calorific values for both fuels are almost the same as well. However, the viscosity and pour point indicate that HFO is heavier than HCGO. Hence, HFO requires heating for better atomization and sufficient air-fuel mixing. HFO is a product of simple refinery and HCGO is a product of complex refinery. HFO is a residual product, and HCGO is considered as distilled product. Contaminants elemental analysis shows high concentration of Fe, V, Ni, Ca and Zn in HCGO than in HFO, inspite the fact that HFO is a residual product and HCGO is a distilled product (the metal content should be nill). In other words the level of heavy metal should be higher in residual oils than distillate oils. This is not surprising as the crude oil of Nile blend (the base of HFO) contains less heavy metals that Fula blend (the base of HCGO).

4.2 Emission Level

Figures 1 shows the stack composition of O₂ and CO₂ for HFO and HCGO respectively. The solid line indicates the theoretical level. It can be seen that the experimental results matches the theoretical results with no significant variation. This is attributed to the high level of accuracy in the elemental and physical analysis of the fuels and emissions.

4.3 Emission of carbon monoxide (CO)

Tables 4 and 5 show CO emission level for HFO and HCGO respectively. The presence of CO is inductive of incomplete combustion. Incomplete combustion may be due to many reasons [7-9]:

1. Insufficient oxygen (O₂). Clearly CO concentration is high at low values of fuel - air ratio. This is expected, as the air is just enough for complete combustion. If small amount of this air went off combustion for example due to poor fuel/air mixing and atomizing temperature the lack of air will occur. Other factors of insufficient air include cold-wall flame quenching; reduced combustion temperature; decreased combustion gas residence time; to mention a few.
2. Combustion efficiency. The rate of emission in smaller boilers and furnaces is more than that of large equipment. This is due to the fact that smaller combustors have higher heat transfer area to flame volume ratio than larger one.

Hence high heat losses and reduced flame temperature and combustion intensity and hence, lower combustion efficiency.

4.4 Emission of NO_x

Tables 4 and 5 show NO_x emission level for HFO and HCGO respectively. Clearly there is no clear trend with fuel - air ratio although previous studies reported exponential trend of NO_x with flame temperature, N₂ concentration in the flame, the square root of O₂ concentration in the flame and residence time [9]. Nevertheless, for both fuels the fuel air ratios of 1.15 to 1.20 yield the least emission.

5. CONCLUSIONS

This work provided information on the level of emission of local heavy fuels oil. This information is vital to industry and environmental engineers

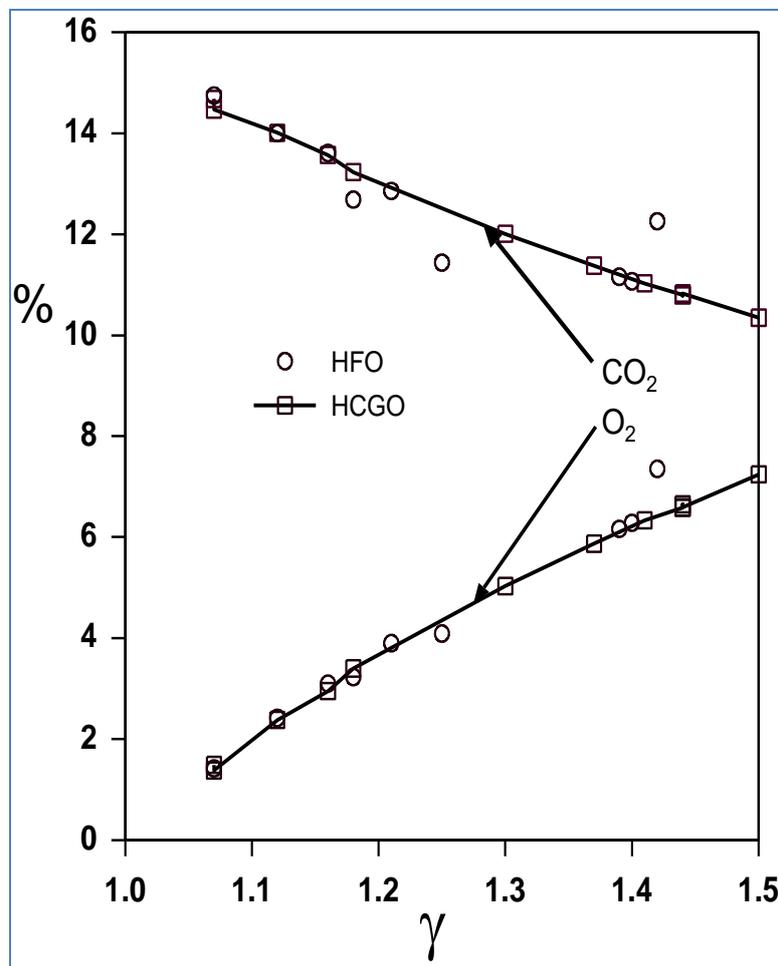


Fig. 2. CO₂ and O₂ in HFO and HCGO

Table 3. CO and NO_x in HFO

Test Conditions: $m_{fuel}=1.75$ kg/h, $T_{ambient}=40\pm 2^{\circ}C$, $AF_{stoichiometric}=13.80777$ kg air/kg fuel					
γ	T_{adia}	CO ₂	O ₂	CO	NO _x
-	°C	%	%	ppm	ppm
1.42	1697	12.26	7.35	243	83.6
1.40	1719	11.07	6.28	151	99
1.39	1730	11.16	6.16	93	116.2
1.25	1876	11.44	4.09	87	118.7
1.21	1923	12.86	3.90	75	81.7
1.18	1965	12.69	3.23	78	112.8
1.16	1990	13.61	3.10	68	83.6
1.12	2043	14.00	2.42	109	88.5
1.07	2121	14.75	1.42	198	109.5

Table 4. CO and NO_x in HCGO

Test Conditions: $m_{fuel}=1.75$ kg/h, $T_{ambient}=40\pm 2^{\circ}C$, $AF_{stoichiometric}=13.8617$ kg air/kg fuel					
γ	T_{adia}	CO ₂	O ₂	CO	NO _x
-	°C	%	%	ppm	ppm
1.50	1614	10.35	7.24	72	130.4
1.44	1666	10.79	6.65	98	120.2
1.44	1671	10.83	6.59	127	119.3
1.44	1671	10.80	6.58	771	97.9
1.41	1694	11.03	6.33	87	122.3
1.37	1735	11.38	5.87	128	112.7
1.30	1807	12.01	5.03	49	129.5
1.18	1943	13.23	3.40	106	94.9
1.16	1980	13.57	2.95	50	119.7
1.12	2026	14.01	2.38	77	107.4
1.07	2089	14.47	1.49	3035	82.1
1.07	2102	14.68	1.38	1217	87.1

REFERENCES

[1] Smith, W. S., Atmospheric Emissions From Fuel Oil Combustion: An Inventory Guide, 999-AP-2, U. S. Environmental Protection Agency, Washington, DC, November 1962.

[2] Danielson, J. A. (ed.), Air Pollution Engineering Manual, Second Edition, AP-40, U. S. Environmental Protection Agency, Research Triangle Park, NC, 1973.

[3] Fossil Fuel Fired Industrial Boilers — Background Information: Volume 1, EPA-450/3-82-006a, U. S. Environmental Protection Agency, Research Triangle Park, NC, March 1982.

[4] U. S. Environmental Protection Agency, "National Primary and Secondary Ambient Air Quality Standards", Code of Federal Regulations, Title 40, Part 50, U. S. Government Printing Office, Washington DC, 1991.

[5] Levy, A., A Field Investigation Of Emissions From Fuel Oil Combustion For Space Heating, API Bulletin 4099, Battelle Columbus Laboratories, Columbia, OH, November 1971

[6] Cato, G. A. Field Testing: Application Of Combustion Modifications To Control Pollutant Emissions From Industrial Boilers—Phase II, EPA-600/ 2-76-086a, U. S. Environmental Protection Agency, Washington, DC, April 1976.

[7] Floyd, J. E. (2008). Multi-Parameter, Multiple Fuel Mixture Fraction Combustion Model for Fire Dynamics Simulator. National Institute of Standards and Technology, U.S. Department of Commerce, Building and Fire Research Laboratory. Gaithersburg: Hughes Associates, Inc.

[8] Khartoum North Power Station Chemical Analysis Records, 2011

[9] Liberman, M. (2008). Introduction to Physics and Chemistry of Combustion, Explosion, Flame, Detonation (1st ed.). Verlag Berlin Heidelberg, German: Springer